



MAESTRO • PLANUX • DIVA • BRAVO • GENIUS • STYLE

# Catalogue **kit**

# STYLE5<sup>kit</sup> STYLE2<sup>kit</sup>



**Single family kit**



**Two family kit**

## art. 8270 - 2 wire system

StyleKit 2



N°1 art. 2612



N°1 art. 1200



N°1 art. 3554



N°1 art. 3561

## art. 8271 - 5 wire system

StyleKit 5



N°1 art. 2602



N°1 art. 1200



N°1 art. 3554



N°1 art. 3551

## art. 8272 - 5 wire system

StyleKit



N°2 art. 2602



N°1 art. 1200



N°1 art. 3554




N°1 art. 3553

## STYLE5<sup>kit</sup>

### High sound quality


Style Kit 5 is the "ideal" door entry phone kit which uses 5 wires and is available in the single-family and two-family version. Style Kit 5 has an original and innovative design characterised by its unmistakable and exclusive blue LEDs, by large name labels and by high sound quality. Simply by adding a telephone or an additional bell allows easy expansion and an elegant desk base ensures flexibility for all needs. The external unit is surface-mounted, but box art. 3554 is also included in the pack, to make the external unit flush-mounted.

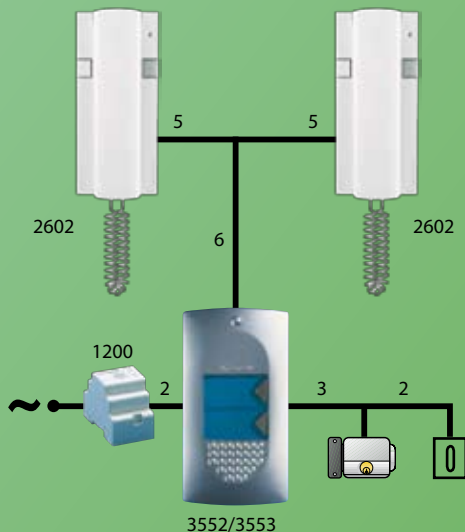

## STYLE2<sup>kit</sup>

### The simple system

Style Kit 2 is the single-family door entry phone kit made by Comelit. It is very simple to install since it only uses 2 conductors. Style Kit 2 has an original and innovative design characterised by its unmistakable and exclusive blue LEDs, by large name labels and by high sound quality. Simply by adding a telephone or an additional bell allows easy expansion and an elegant desk base ensures flexibility for all requirements.

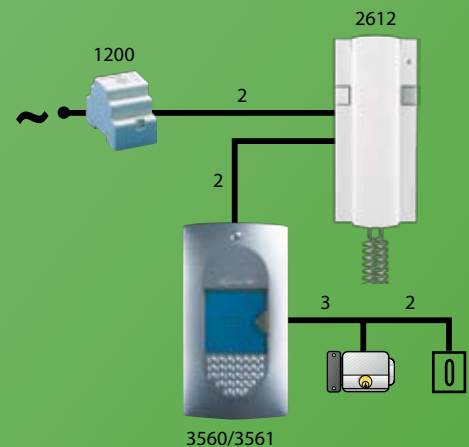

## AUDIO kit

Stylekit is also available in the VANDALCOM version.



Stylekit is also available in the POWERCODE version.



### art. 8220S

Style Kit



N°1 art. 2602

### art. 8241S

Style Kit



N°1 art. 2602

# GENIUS<sup>kit</sup>

Elegance and functionality



**Single family kit**



**Two family kit**

## art. 8481


Color Genius Kit




N° 1 art. 5802



N° 1 art. 5814KC



N° 1 art. 1216



N° 1 art. 1214KC



N° 1 art. 4882



N° 1 art. 1205/B

## art. 8471


B&W Genius Kit




N° 1 art. 5801



N° 1 art. 5814K



N° 1 art. 1216



N° 1 art. 1214/2



N° 1 art. 4880



N° 1 art. 1205/B

## art. 8482


Color Genius Kit




N° 2 art. 5802



N° 2 art. 5814KC



N° 1 art. 1216



N° 2 art. 1214KC



N° 1 art. 4883



N° 1 art. 1205/B

## art. 8472


B&W Genius Kit




N° 2 art. 5801



N° 2 art. 5814K



N° 1 art. 1216



N° 2 art. 1214/2




N° 1 art. 4881




N° 1 art. 1205/B



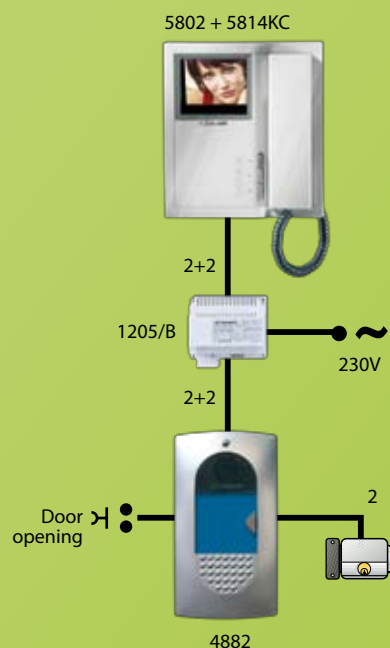

Particularly simple, versatile video intercom system, comprising a flush or surface mounted entrance panel. The b/w and colour monitor features an elegant gloss outer case with silk screen printing, and has 3 pushbuttons: door open, actuator (or free C/N.O.) and staircase lighting (or video request). GeniusKit allows call repetition by means of special terminals and duplication of the door open pushbutton even in the vicinity of the external unit. The standard configuration can be varied easily, by fitting additional monitors or telephones, or a second external video entry panel. Geniuskit can also provide for additional cameras and locks. The basic kit can be expanded to include up to 2 or more external units and 3 monitors per residential unit. Expandable up to 16 internal units with art.1252.

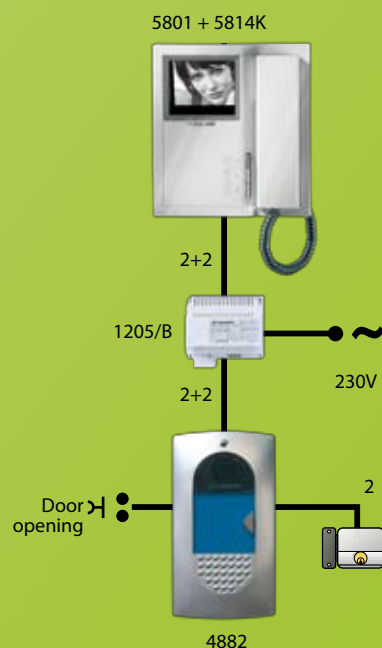

# BRAVO<sup>kit</sup>

Simple, with intercom and versatile



**Single family kit**



**Two family kit  
with intercom**

## art. 8184

Color BravoKit



N° 1 art. 5702



N° 1 art. 5714KC



N° 1 art. 1216



N° 1 art. 4875KC



N° 1 art. 1214KC



N° 1 art. 1205/B

## art. 8171

B&W BravoKit



N° 1 art. 5701



N° 1 art. 5714/K



N° 1 art. 1216



N° 1 art. 4875/BK



N° 1 art. 1214/2



N° 1 art. 1205/B

## art. 8185

Color BravoKit



N° 2 art. 5702



N° 2 art. 5714KC



N° 1 art. 1216



N° 1 art. 4876KC



N° 2 art. 1214KC



N° 1 art. 1205/B

## art. 8173

B&W BravoKit



N° 2 art. 5701



N° 2 art. 5714/K



N° 1 art. 1216





N° 1 art. 4876/BK



N° 2 art. 1214/2



N° 1 art. 1205/B

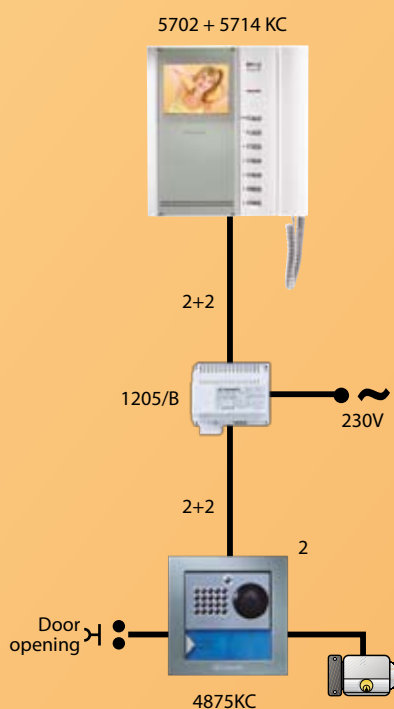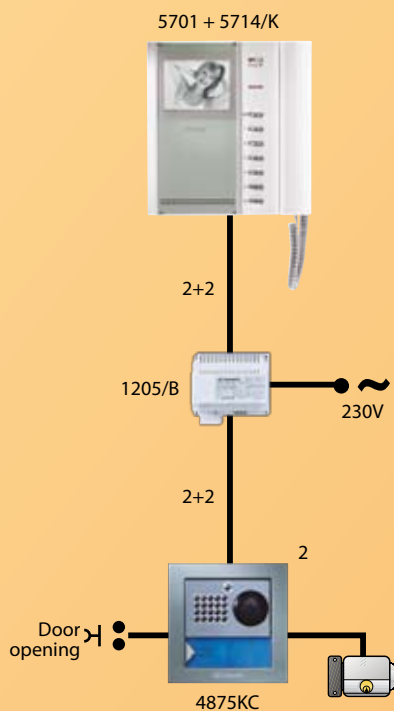

Bravokit - the new video door entry system from Comelit. Based on technology exclusive to Comelit, Simplebus is the last word in simplicity. It comprises the Powercom entrance panel, with its distinctive blue LEDs and original design, and Bravo, the elegant video door entry monitor suitable for all types of residence. The kits are available in both colour and black and white versions. Both types are available in surface-mounted, single-family or two-family versions. The Bravokit includes the "privacy" function and the intercom function. In order to use the intercom function, the single-family kit must be expanded with one or more additional door entry telephones/monitors. The basic kit can be expanded to include up to 2 or more external units and 3 monitors per residential unit. Expandable up to 16 internal units with art.1252.


Bravokit is also available in the VANDALCOM version.

**art. 8361**

Kit Bravo B&W

**art. 8371**

Kit Bravo Colore

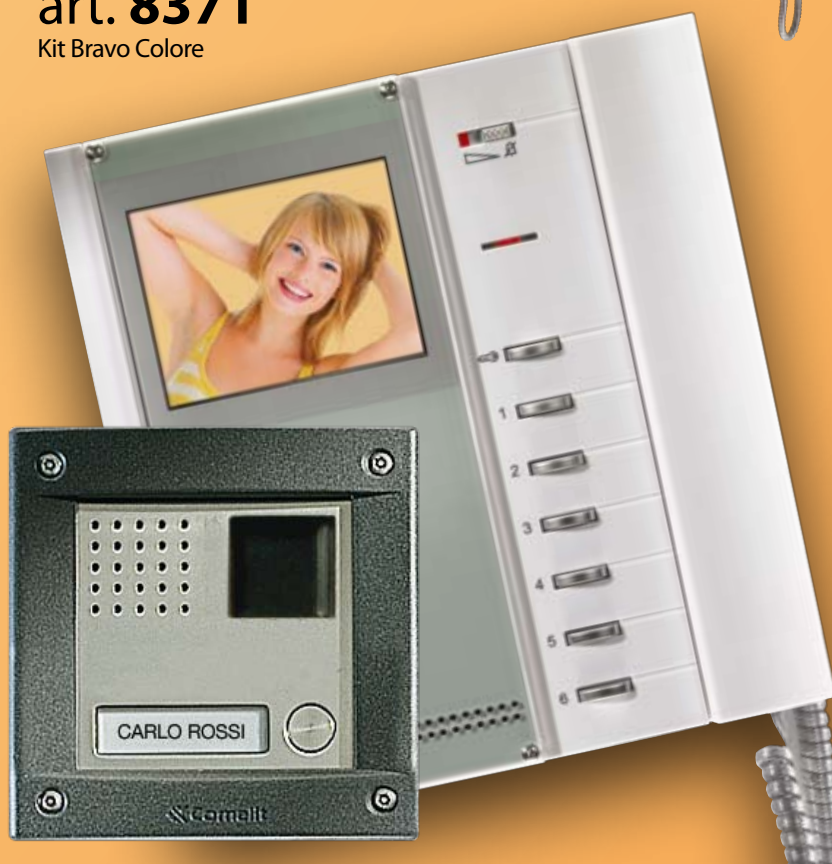



# PLANUX **kit**

## SENSITIVE TOUCH: the sensitive Revolution, colour monitor with intercom



**Single family kit**

### art. 8495B

PlanuxKit with Absolute Black monitor



N° 1 art. 6101W



N° 1 art. 6101B

### art. 8495W

PlanuxKit with All White monitor



N° 1 art. 6114KC



N° 1 art. 6117



N° 1 art. 1205/B



N° 1 art. 1214KC



N° 1 art. 1216



N° 1 art. 4875KC



**Two family kit  
with intercom**

### art. 8496B

PlanuxKit with Absolute Black monitor



N° 2 art. 6101W



N° 2 art. 6101B



N° 2 art. 6114KC



N° 2 art. 6117



N° 1 art. 1205/B



N° 2 art. 1214KC




N° 1 art. 1216



N° 1 art. 4876KC



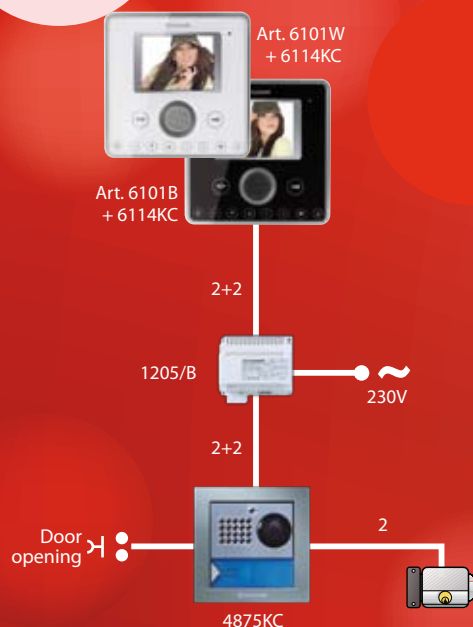

#### PLANUX | Classic



Black



White

#### PLANUX | Prestige



Green Valley



Madre Perla



Wengé



Gold

#### PLANUX | Trendy



Rock Violet



Orange Sunshine



Royal Red



Blue Sky

These state-of-the-art solutions come in an exclusive, original form derived from Comelit's research and creativity, which minimises overall dimensions and maximises elegance and practicality. A "touch sensitive" monitor (3,5") to add some magic to your day, with every function programmable by simply touching the panel. Available in four different models for all design and operational requirements: wall-mounted, wall-mounted with tiltable monitor, flush mounted with a minimal 8mm overhang and as a table model with an elegant coordinated stand. Three different colours for three different life-styles and experiencing the world: Classic, Prestige and Trendy. In order to use the intercom function, the single-family kit must be expanded with one or more additional door entry telephones/monitors. The basic kit can be expanded to include up to 2 or more external units and 3 monitors per residential unit. Expandable up to 16 internal units with art.1252.



# DIVA<sup>kit</sup>

The style of a star: colour monitor  
with intercom



**Single** family kit



**Two** family kit  
with intercom

## art. 8491B art. 8491

DivaKit with Black monitor DivaKit with Silver monitor



N° 1 art. 4780

N° 1 art. 4780B

N° 1 art. 4784KC




N° 1 art. 1205/B



N° 1 art. 1214KC




N° 1 art. 1216



N° 1 art. 4875KC

## art. 8492B art. 8492

DivaKit with Black monitor DivaKit with Silver monitor

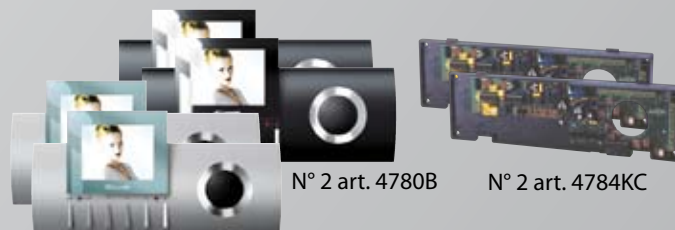

N° 2 art. 4780

N° 2 art. 4780B

N° 2 art. 4784KC



N° 1 art. 1205/B



N° 2 art. 1214KC




N° 1 art. 1216



N° 1 art. 4876KC

As further confirmation of Comelit's commitment to making the fruits of their research and development as easy and accessible as possible, DIVA is also available in a special KIT containing everything needed for installation. Easy and affordable technical solutions for single- or two-family installations, compatible with the large range of Comelit accessories. The basic kit can be expanded to include up to 2 or more external units and 3 monitors per residential unit. Expandable up to 16 internal units with art.1252.

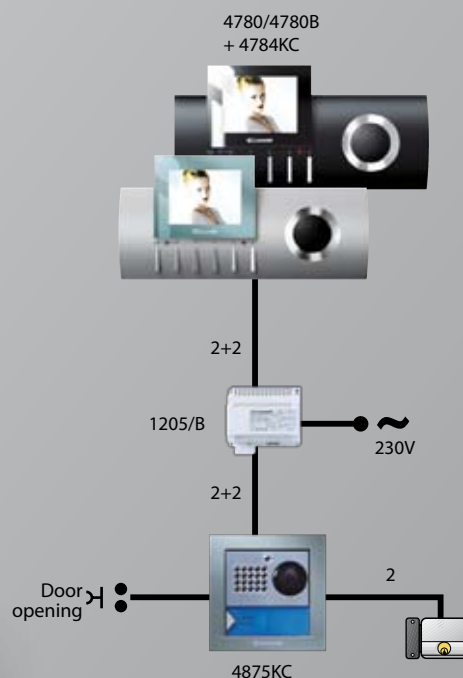



# Maestro **kit**

Design, technology and  
functionality: colour monitor  
with intercom



**Single** family kit

## art. **8493B**

MaestroKit with Black  
monitor



N° 1 art. 5900B



N° 1 art. 5900G



N° 1 art. 1205/B



N° 1 art. 1214KC



N° 1 art. 1216



N° 1 art. 5914KC



N° 1 art. 4875KC



**Two** family kit  
with intercom

## art. **8494B**

MaestroKit with Black  
monitor



N° 2 art. 5900B



N° 2 art. 5900G



N° 1 art. 1205/B



N° 2 art. 1214KC



N° 1 art. 1216




N° 2 art. 5914KC



N° 1 art. 4876KC

## art. **8494G**

MaestroKit with Silver  
monitor

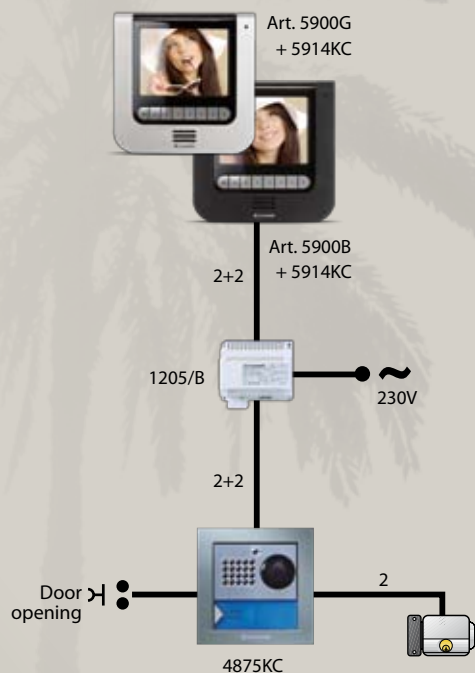


Maestrokkit is the new video entry kit composed of the Powercom keypad and Maestro, the new elegant and versatile video entry phone, ideal for any residential installation. The kits are available in single and two family versions. In both cases, the privacy and intercom functions are standard features. In order to use the intercom function, the single-family kit must be expanded with one or more additional entry phones/monitors. The basic kit can be expanded to include up to 2 or more external units and 3 monitors per residential unit. Expandable up to 16 internal units with art.1252.




# Maestro


# Variant diagrams

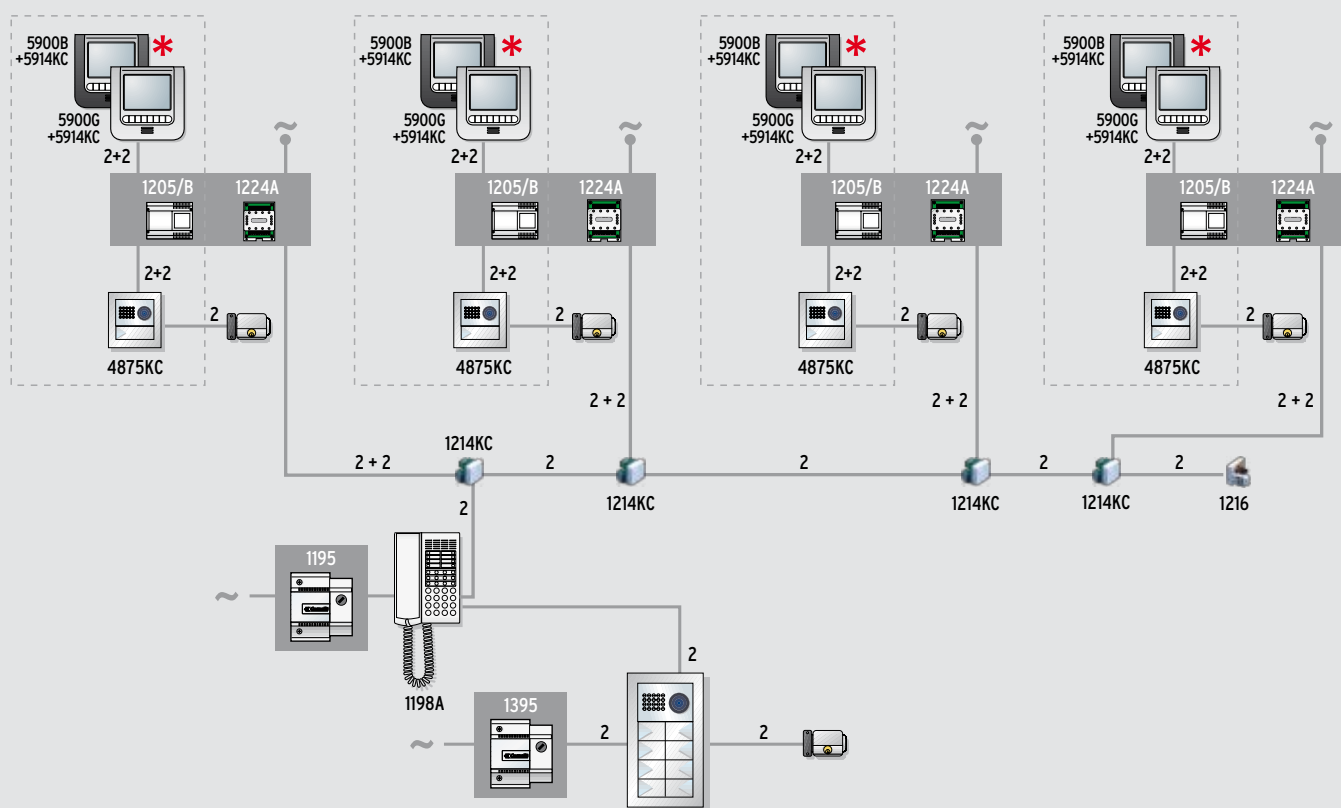

For Gated Developments with one main entrance and concierge unit

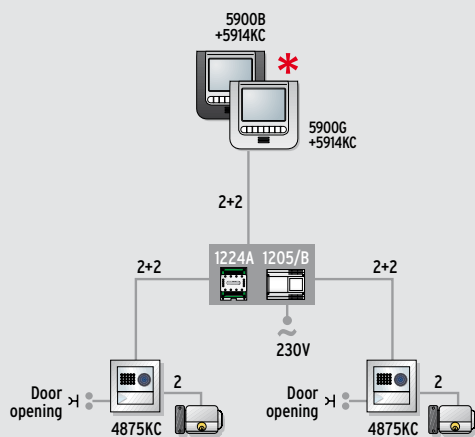


Variant with second entrance for single-family kit

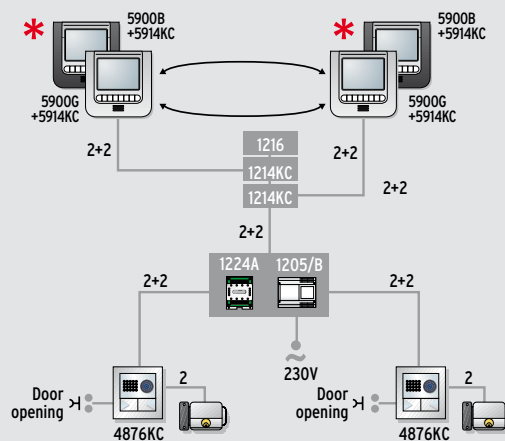


Variant with second entrance for two-family kit




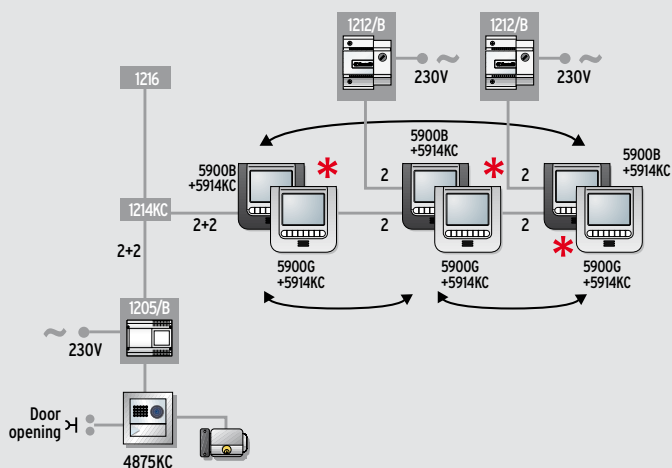


Variant with two additional monitors for single-family kit

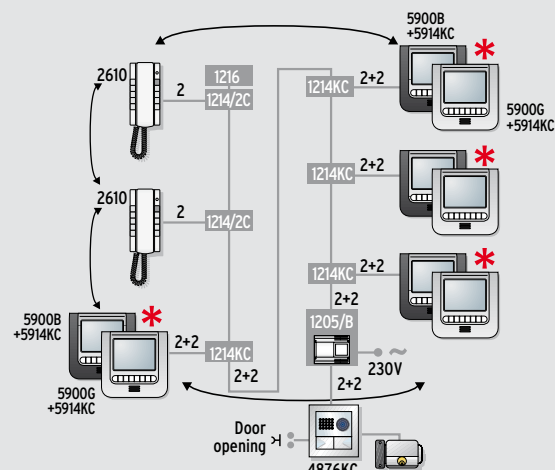


Variant with two additional monitors or entry phones for two-family kit

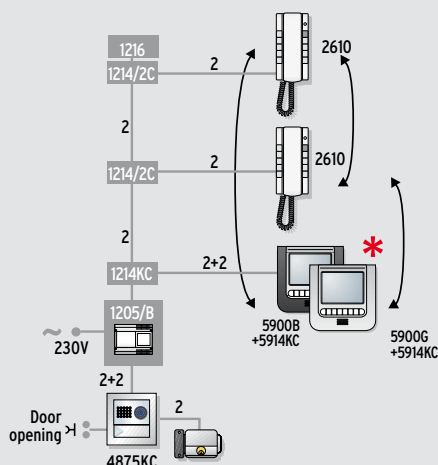


Variant with two additional entry phones for single-family kit

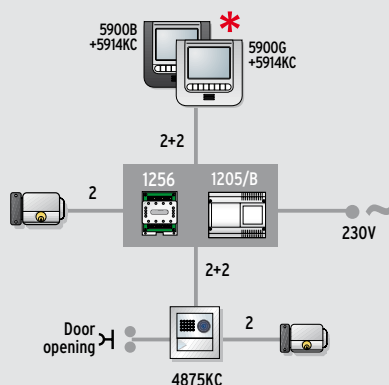


Variant with additional lock for single-family kit

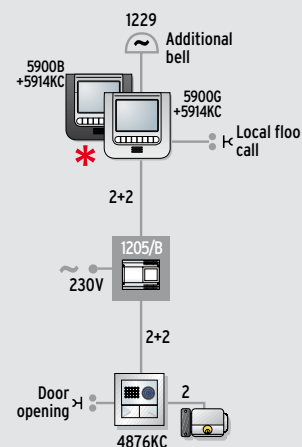

Variant with floor door call connection and additional bell for single and two-family kit

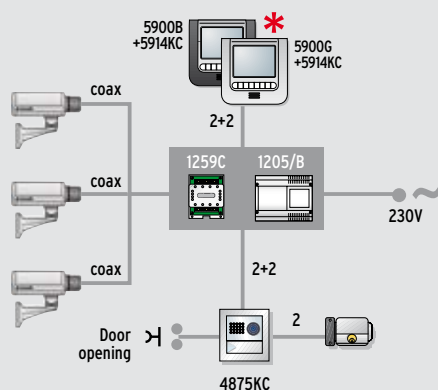

Variant with additional cameras for single-family kit



With DIVA monitor use  
art. **4780B + 4784KC** or  
art. **4780 + 4784KC**



With PLANUX monitor use  
art. **6101B + 6114KC** or  
art. **6101W + 6114KC**



With BRAVO monitor use  
art. **5702+5714KC (Color)** or  
art. **5701+5714/K (B&W)**



With GENIUS monitor use  
art. **5802+5814KC (Color)** or  
art. **5801+5814K (B&W)**  
GENIUS monitor is not intercommunicating

## For ease of use follow the colour coded accessories table below

**Maestrokit**

**Planuxkit**

**Divakit**

**Bravokit**

**Geniuskit**

**Stylekit2**

**Stylekit5**



### 4875/BK Additional external unit with 1 pushbutton.

External unit, with 1/3 CCD B/W camera, infrared lighting, microphone and loudspeaker volume adjustment, aluminium call pushbutton with name label. Complete with die-cast aluminium module-holder frame and flushmounting box.

### 4875KC Additional external unit with 1 pushbutton

External unit, with 1/3 CCD colour camera, led camera illumination, microphone and loudspeaker volume adjustment, aluminium call pushbutton with name label. Complete with die-cast aluminium module-holder frame and flush-mounted box.



### 4876/BK Additional external unit with 2 pushbuttons.

External unit, with 1/3 CCD B/W camera, infrared lighting, microphone and loudspeaker volume adjustment, aluminium call pushbutton with name label. Complete with die-cast aluminium module-holder frame and flushmounting box.

### 4876KC Additional external unit with 2 pushbuttons

External unit, with 1/3 CCD colour camera, led camera illumination, microphone and loudspeaker volume adjustment, aluminium call pushbutton with name label. Complete with die-cast aluminium module-holder frame and flush-mounted box.



### 4880 Single-family B/W Entrance Panel

Flush / Surface-mounted external video entry phone (the external unit is surface mounted but a box art. 3554 is also provided to allow flush mounted installation of the external unit) with anodized aluminium facing and ample name holder slots, with LED rear-lighting. 12V AC power supply. Dimensions of external unit: 95x176x15 mm. Dimensions of flush-mounted box: 95,5x176x5x35 mm.



### 4881 Two-family B/W button pad

As art. 4880 but with 2 buttons.



### 4882 Single-family colour Entrance Panel

Flush / surface-mounted external video entry phone (the external unit is surface mounted but a box art. 3554 is also provided to allow flush mounted installation of the external unit) with anodized aluminium facing and nameplate holder, with LED rear-lighting. 12V AC power supply. Dimensions of external unit: 95x176x15 mm. Dimensions of flush-mounted box: 95,5x176x5x35 mm.



### 4883 Two-family Entrance Panel

As art. 4882 but with 2 buttons.



**3550 Flush-mounted door entry external unit 1 push-button for 5 wire kit**  
Flush-mounted door entry phone external unit with front in anodised aluminium and large nameholder label lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, callgenerator, watertight loudspeaker and electret micro-phone. 12V AC power supply. Dimensions of external unit: 95x176x15 mm. Dimensions of flush-mounted box: 95,5x176,5x35 mm.



### 3551 Surface-mounted door entry external unit 1 push-button for 5 wire kit

Surface-mounted door entry phone external unit with front in anodised aluminium and large nameholder label lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, call generator, watertight loudspeaker and electret microphone. 12V AC power supply. Dimensions of external unit: 95x176x25mm.



### 3552 Flush-mounted door entry external unit 2 push-buttons for 5 wire kit

Flush-mounted door entry phone external unit with front in anodised aluminium and large nameholder label lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, callgenerator, watertight loudspeaker and electret micro-phone. 12V AC power supply. Dimensions of external unit: 95x176x15 mm. Dimensions of flush-mounted box: 95,5x176,5x35 mm.



### 3553 Surface-mounted door entry external unit 2 push-buttons for 5 wire kit

Surface-mounted door entry phone external unit with front in anodised aluminium and large nameholder label lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, call generator, watertight loudspeaker and electret microphone. 12V AC power supply. Dimensions of external unit: 95x176x25mm.



### 3560 Flush-mounted door entry external unit - 1 push-button for 2 wire kit

Flush-mounted door entry external unit with front in anodised aluminium and 1 aluminium call pushbutton, large name holder lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, watertight loudspeaker and electret microphone. Dimensions of external unit: 95x176x15 mm.

### 3561 Surface-mounted door entry external unit - 1 push-button for 2 wire kit

Flush-mounted door entry external unit with front in anodised aluminium and 2 aluminium call pushbutton, large name holder lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, watertight loudspeaker and electret microphone. Dimensions of external unit: 95x176x15 mm.




### 4660/BK A/V unit with camera

A/V unit with 1/3 CCD B/W camera, infrared lighting, microphone and loudspeaker volume adjustment.



### 4660KC A/V unit with camera

A/V unit with 1/3 CCD colour camera, led camera illumination, microphone and loudspeaker volume adjustment.



### 3328/PK Powercode kit

This article allows completion of external units art. 4875/l and art. 4876/l with a coded electronic key for access door opening by means of an 8-figure secret code which can be programmed by the user. The article includes a coded electronic key module with 2 relays art. 3328, a flush-mounted box art. 3110/2 and a frame art. 3311/2.



### 3312/1 Rain shield for Powercom entrance panel. N° modules: 1

Rain shield for Powercom entrance panel. N° modules: 1  
Dimensions: 135x135,5x60mm.



### 3316/1 Surface-mounted boxes. N° modules: 1

Surface-mounted boxes. Stainless steel housing. N° modules: 1  
Dimensions: 123x123x32,5 mm.



### 3319/1 Surface-mounted housing with rain shield. N° modules: 1

Surface-mounted housing with rain shield. N° modules: 1  
Dimensions: 135x135x91 mm



### 3554 Flush-mounting box

Flush-mounting box.  
Dimensions: 95,5x176,5x35mm.

### 4887 Protection housing for Idea surface-mounted button pad

Protection housing with rain shield for Idea wall-mounted keypad.  
Dimensions: 119x196x76 mm



**4889 Protection visor for Idea flush-mounted button pad**  
Protection visor with rain shield for Idea flush-mounted button pad.  
Dimensions: 115x195x52 mm



**5900B Maestro Black Monitor**  
Colour monitor with 5.6" high-resolution display. Made in ABS with aluminium fascia, half-duplex handsfree function with audio, ringtone, colour and contrast controls. Fitted with 1 door-opening pushbutton, 1 audio pushbutton, 1 pushbutton for the privacy function and 5 pushbuttons for a variety of functions. The monitor converts into the desktop version with art. 5912. Dimensions: 185x185x38mm



**5900G Maestro Silver Monitor**  
Colour monitor with 5.6" high-resolution display. Made in ABS with aluminium fascia, half-duplex handsfree function with audio, ringtone, colour and contrast controls. Fitted with 1 door-opening pushbutton, 1 audio pushbutton, 1 pushbutton for the privacy function and 5 pushbuttons for a variety of functions. The monitor converts into the desktop version with art. 5912. Dimensions: 185x185x38mm



**5914KC Bracket for Maestro Kit**  
Bracket for Simplebus Color system, required for Maestro monitor. Handles local floor calls and call repetition as standard. Maestro pushbuttons 1 to 5 can be programmed. 1 button can be free with a N.O contact on the terminal block. Equipped with LED input for a variety of signals. Dimensions: 116x110x19 mm.



**5912 Desk base for Maestro monitor**  
Desk base converts the Maestro monitor into the desktop version. Complete with 2 m of cable and connection box  
Dimensions: 180 x 180 x 180 mm



**6101B Planux monitor in black**  
3.5" colour monitor with OSD. Equipped with "sensitive touch" technology and full-duplex hands-free function. Audio, ringtone, colour, brightness and contrast controls. You can select the ringtone you want from a choice of 7 different tunes. Equipped with door lock release pushbutton with LED, audio enable/disable pushbutton with LED, privacy or doctor function (selectable from menu) pushbutton, automatic switch-on pushbutton, 2 spare pushbuttons for various uses and 4 pushbuttons for menu access, navigation and confirmation. The monitor can be converted into a desktop version using art. 6112 or 6113. Dimensions 145x145x33mm.



**6101W Planux monitor in white**  
3.5" colour monitor with OSD. Equipped with "sensitive touch" technology and full-duplex hands-free function. Audio, ringtone, colour, brightness and contrast controls. You can select the ringtone you want from a choice of 7 different tunes. Equipped with 1 door lock release pushbutton with LED, audio enable/disable pushbutton with LED, privacy or doctor function (selectable from menu) pushbutton, automatic switch-on pushbutton, 2 spare pushbuttons for various uses and 4 pushbuttons for menu access, navigation and confirmation. The monitor can be converted into a desktop version using art. 6112 or 6113. Dimensions 145x145x33mm.



**6114KC Bracket for wiring Simplebus Color for Planux monitor**  
The video door entry system is complete conversation privacy as standard. Handles local floor calls and call repetition as standard.  
Dimensions: 96X106X17 mm.



**6112 Desktop base with 8 terminals for Planux monitor**  
Desktop base for converting the Planux monitor for desktop use. Complete with 2 m of RJ45 terminated cable for the use of RJ45 wall sockets and connection box. Dimensions: 145X190X120 mm



**6117 Flush-mount box for Planux monitor**  
Flush-mount box for Planux monitor. For use with with tilt accessory art. 6122. Dimensions: 132X132X50 mm



**6120 Surface housing for Planux monitor**  
Surface housing for Planux monitor. Cannot be used with tilt accessory art. 6122. Dimensions: 145X145X26 mm



**6121 Surface Housing for Planux monitor**  
Long bracket for wall-mounting of Planux monitor. For use with with tilt accessory art. 6122. Dimensions: 145X145X45 mm



**6122 Tilt accessory for Planux monitor**  
Accessory for tilting the Planux monitor, for use in conjunction with art. 6121 or flush-mount box art. 6117. Allows tilting of the Planux monitor up to a maximum of 20°. Dimensions: 136X136X40 mm. Maximum tilt 20°.



**6101Z Planux was also designed for people who want the utmost simplicity of use from their internal unit and only want entry call and door lock release functions.**  
Planux was also designed for people who want the utmost simplicity of use from their internal unit and only want entry call and door lock release functions.



6101L  
White



6101N  
Black



6101D  
Green Valley



6101E  
Madre Perla



6101C  
Wenge



6101J  
Gold



6101F  
Rock Violet



6101G  
Orange Sunshine



6101H  
Royal Red



6101I  
Blue Sky



**4780B DIVA hands-free monitor**  
Colour Monitor with 3.5" high resolution LCD. Made of ABS plastic with aluminium fascia, fitted with brightness, call volume adjustment, door-opening pushbutton, a voice activation pushbutton provided with LED and 1 pushbutton for the "privacy" function provided with LED. This LED has dual functions one for privacy and the other to indicate the simplex speech mode. There are also 3 free pushbuttons (N.O.) for various services. It can be converted into the desk version by adding art. 4782. Dimensions: 260 x 127 x 38 mm.



**4780 DIVA hands-free monitor**  
Colour Monitor with 3.5" high resolution LCD. Made of ABS plastic with aluminium fascia, fitted with brightness, call volume adjustment, door-opening pushbutton, a voice activation pushbutton provided with LED and 1 pushbutton for the "privacy" function provided with LED. This LED has dual functions one for privacy and the other to indicate the simplex speech mode. There are also 3 free pushbuttons (N.O.) for various services. It can be converted into the desk version by adding art. 4782. Dimensions: 260 x 127 x 38 mm.



**4784KC Bracket for monitor**  
Bracket for Diva monitor art. 4780 and 4780B, to use with all Divakits art. 8491-8491B-8492 and 8492B. Fitted with branch terminal art. 1214KC.



**4781 DIVA hands-free telephone**  
Made with of ABS and an with aluminium fascia. front, fitted with Hands-free function, brightness and call tone volume adjustment. Fitted with a door-opening pushbutton, a speech sound enabling pushbutton provided with LED indication, 1 pushbutton for the "privacy" function provided with LED and 3 free (N.O.) pushbuttons for various services. It can be converted into the desk version by adding art. 4782. Dimensions: 94 x 260 x 38 mm.



**4782 Desk base**  
Desk base made of anodised aluminium, allows conversion of the DIVA monitor into the desk version. Complete with 1.5 mt of cable and connection bushing for connection. Dimensions: 84 x 104 x 245 mm.



## Maestrokit

### Planuxkit

### Bravokit

### Stylekit2

### Divakit

### Geniuskit

### Stylekit5

#### 5701 Bravo HANDSET version B/W monitor

Handset version Bravo monitor with 4 B/W screen, The chrome keys, the brilliant white gloss finish combined with the silver colour base combined with the etched glass effect facia, white gloss colour, with silver bottom coverfacia. It is fitted as standard with door open pushbuttons and two pushbuttons for various functions, signalling LED, brightness adjustment, contrast adjustment, and slide call volume adjustment. The Privacy Call tone function, which allows the video entry phone call tone to be temporarily excluded, is standard and is obtained by positioning the call volume on zero. It can be converted into the desk version with art. 5712. Dimensions: 212x225x55 mm

#### 5702 BRAVO HANDSET version COLOUR

Monitor Handset version Bravo monitor with 4 colour screen, white gloss colour, with the rear silver coloured base. It is fitted as standard with door open pushbuttons and two pushbuttons for various functions, signalling LED, brightness adjustment, contrast adjustment and slide call volume adjustment. The Privacy function, which allows the video entry call to be temporarily excluded, is standard and is obtained by positioning the call volume on zero. It can be converted into the desk version with art. 5712. Dimensions: 212x225x55 mm

#### 5714/K Bracket

Completion bracket for Bravo monitor art. 5701. Fitted with branch terminal art. 1214/2.

#### 5714KC Bracket for Bravokit colour kit

Completion bracket for Bravo monitor with colour Bravokit. Fitted with branch terminal art. 1214KC.

#### 5712 Desk base

This allows all the BRAVO monitors, either in the handset or hands-free-version to be converted into the desk base. Complete with 2 mt of cable and connection bushing. Dimensions: 173 x 186,5 x 174mm.

#### 5801 Genius Monitor in B/W version

Genius monitor with 4" B/W screen, white matt finishcolour. Fitted as standard with blue door open pushbutton and two grey pushbuttons for various functions. The handset has a cord with a connection plug for connecting it to the monitor. It has a small wheel for adjusting the brightness control and a selector for the call volume, adjustable to three different positions (high, medium and low). It can be converted into a the desk version using art. 5712. Dimensions: 204x225x63 mm

#### 5802 Genius Monitor in COLOUR version

Genius monitor with 3,5" colour screen, white matt finishcolour. Fitted as standard with blue door open pushbutton and two grey pushbut-tons for various functions. The handset has a cord with a connection plug for connecting it to the monitor. It has a small wheel for adjusting the brightness control and a selector for the call volume, adjustable to three different positions (high, medium and low). It can be converted into the desk version using art. 5712. Dimensions: 204x225x63 mm

#### 5814K Bracket

Completion bracket for monitor art. 5801. Fitted with branch terminal art. 1214/2.

#### 5814KC Bracket

Completion bracket for Genius monitor art. 5802. Provided with branch terminal 1214KC.

#### 2642W/16 White desk base for Style telephones with 16 terminals

White desk conversion kit forbase which allows conversion into desk version of all the telephones in the Style series. Complete with 1.5 mt of white cable and connection bushing fitted with 16 connection terminals. Dimensions 84x189x32 mm

#### 2642B/16 Black desk base for Style telephones with 16 terminals

Black desk conversion kit forbase which allows conversion into desk version of all the telephones in the Style series. Complete with 1.5 mt of black cable and connection bushing fitted with 16 connection terminals. Dimensions 84x189x32 mm

#### 2602 Basic version telephone for Traditional cabling

Telephone with electronic call, conversation button on the base, call to-nevolume adjustment and privacy, door open pushbutton and supplementary isolated pushbutton for additional services with independent common. With this model, addition of pushbuttons or supplementary LEDs is not possible. Dimensions: 95x215x58 mm

#### 2608 Basic version telephone for digital Simplebus cabling (only for audio systems)

Telephone with electronic call, conversation button on the base, call tone volume adjustment, conversation secrecyprivacy of speech, call tone privacy, door open pushbutton and supplementary pushbutton for porter switchboard call or free (C/N.O.). By means of selection jumper, the second pushbutton can be used to control actuator art. 1256. Allows management of the local floor door call and call repetition. Complete with dip-switch with 8 positions for selection of the desired user code. With this model, addition of pushbuttons or supplementary LEDs is not possible. Dimensions: 95x215x58 mm

#### 2612 Basic version entry phone for Stylekit kits

Additional entry phone for kit 8270, with electronic call, call button on the base, call volume adjustment, privacy, door open pushbutton and free (C/N.O.) pushbutton. Dimensions: 95x215x58 mm.

#### 2628 Elegance version telephone for digital Simplebus cabling (for mixed systems)

Telephone with electronic call, conversation button on the base, call volume adjustment, privacy privacycall tone, conversation secrecyprivacy of speech. Fitted with door open pushbutton, switchboard call, actuator control art. 1256 and free (C/N.O.). Up to 6 supplementary pushbuttons can be added, of which a maximum of 3 LEDs. Allows management of the local floor door call and call repetition. Complete with dip-switch with 8 positions for selection of the desired user code. Telephone to be used in mixed audio/video systems (Simplebus 1 and Simplebus 2) or in audio systems when the call repetition function is neededrequired. Fitted with terminal 1214/2. With this model, the cover can facia can be replaced. Dimensions: 95x215x58 mm

#### 2628B Elegance version black telephone for digital Simplebus cabling (for mixed systems)


Telephone with electronic call, conversation button on the base, call volume adjustment, privacycall tone privacy, conversation secrecyprivacy of speech. Fitted with door open pushbutton, switchboard call, actuator control art. 1256 and free (C/N.O.). Up to 6 supplementary pushbuttons can be added, of which a maximum of 3 LEDs. Allows management of the floor door call and call repetition. Complete with dip-switch with 8 positions for selection of the desired user code. Telephone to be used in mixed audio/video systems (Simplebus 1 and Simplebus 2) or in audio systems when the call repetition function is neededrequired. Fitted with terminal 1214/2. With this model, the faciacycover can be replaced. Dimensions: 95x215x58 mm


#### 2610 Elegance version telephone for Simplebus digital cabling with privacy/doctor function and intercom service (the intercom service is only available if the telephone is used in the Bravokit)


Telephone with electronic call, conversation button on the base, call volume adjustment, conversation secrecyprivacy of speech, call tone privacy. Fitted as standard with door open pushbuttons, porter switchboard call, actuator control Art. 1256 and LED for various functions (engaged and doctor function). Up to 6 supplementary pushbuttons can be added, of which a maximum of 3 LEDs. Allows management of the floor door call and call repetition. Complete with dip-switch with 8 positions for selection of the desired user code. Telephone to be used in mixed audio/video Simplebus 1, Simplebus 2 systems or in the Bravokit kit. If used in the Bravokit, the telephone has the intercom function. Fitted with branch terminal art. 1214/2. With this model, the coverfacia can be replaced. Dimensions: 95x215x58 mm


**1229 Additional bell**

Additional bell for call repetition, which can be controlled directly from terminals S-e S+ of the brackets and/or by the telephones. Surface-mounted or mounted on civil series box 503. Dimensions: 110x75x29 mm. 


**5733 Card with 4 additional pushbuttons**

Card with 4 additional pushbuttons (N/O or for digital services) provided with screws. It can be rapidly inserted inside all the BRAVO series of monitors without having to open the monitor. 


**5734 Card with 2 additional pushbuttons and 2 additional LEDs**

Card with 2 additional pushbuttons (N/O or for digital services) and 2 additional LEDs provided with screws. It can be rapidly inserted inside all the BRAVO series of monitors without having to open the monitor. 


**1224A Audio and audio/video switching device for Simplebus systems**

Switching device for audio or audio-video door entry systems with 2 or more doors. Complete with 2 dip-switches with 8 positions to define the range of user codes for the riser. 12V AC power supply with art. 1200. Dimensions: 60x85x35 mm (4 DIN modules). 

**4833/A Line amplifier for Simplebus video systems**

Video amplifier to be used in the following cases: 1. After the 50th monitor in systems with more than 50 monitors. 2. Each 150 m. (if twisted pair is used) or 100 m. (if normal cable is used) or 80 m. (if twisted and shielded pair is used). 3. At the base of each riser in systems with video main panel and audio or video secondary panels. 4. At the base of each riser in systems with main panel and star-connected risers (max 10). Power supplied at 12VAC. Dimensions: 66x85x35 mm (4 DIN modules). 

**4833C Line amplifier for Simplebus Color video systems**

Amplifier for Simplebus Color video systems. Regenerates the riser signal regarding the video component. Complete with microcontroller for optimum operation management. For its use, follow the indications given in the technical documentation. Power supply: 12V AC or 20V DC. Only to be mounted on the part of the system on input into the mixers art. 4888C (Simplebus 1 part). Dimensions: 66x85x35 mm (4 DIN modules). 


**1122/A General purpose relay**

12/24 V DC/AC 5A general purpose relay. Dimensions: 66x85x35 mm (4 DIN modules). 


**1136/A Double switching relay**

12/24 V DC/AC 5A general purpose relay with 2 switching contacts. Dimensions: 66x85x35 mm (4 DIN modules). 


**1256 Relay actuator**

Intelligent device for controlling a 10A relay (on board) for general uses. It can be used in any type of Simplebus system. For its use and programming the desired function, follow the indications given in the technical documentation. Power supply: 12V AC or 20V DC. Dimensions: 66x85x35 mm (4 DIN modules). 


**1259/A Switcher for remote cameras**

Module which allows modulation and transmission of the video signal coming from 3 B/W cameras visible sequentially together with the image coming from the external unit. Sequential switching of the cameras is possible by using the Bravo or Videocom monitor actuator pushbutton. Possibility of managing private cameras. Power supply: 12 V AC or 20 V DC. Dimensions: 60x85x35 mm (4 DIN modules). 


**1259C Switcher for remote cameras**

Module which allows modulation and transmission of the video signal coming from 3 colour cameras visible sequentially together with the image coming from the external unit. Sequential switching of the cameras is possible by using the Diva, Bravo or Genius actuator pushbutton. Possibility of managing private cameras. Power supply: 12 V AC or 20 V DC. Dimensions: 60x85x35 mm (4 DIN modules). 


**1214/2 Branch terminal**

Line branch terminal. The terminal is to be mounted on the riser to branch towards brackets or telephones. It is provided as standard with the bracket art. 4714W/2 use. Dimensions: 53 x 95 x 65 mm (3 DIN modules). 


**1214/2C Branch terminal for Simplebus Color system**

Line branch terminal. The terminal must be connected on the riser to be branched towards brackets or telephones. 


**1200 Transformer**

Transformer with 230V primary winding, 12V AC / 15 VA secondary winding for continuous use. Dimensions: 53x95x65 mm (3 DIN modules). 

**1212/B Power supply for additional monitor**

Power supply with 230V AC input, 0-20V DC / 15VA output. The transformer is fitted with internal protection PTC. Dimensions: 87.5x105x65 mm (5 DIN modules). 

**1205/B Power supply**

Technical characteristics: The transformer has 2 outputs: one to supply the external unit and the electric lock, and one to supply the monitor. Dimensions: 105x85x85 mm 500mA delayed protection fuse. Terminal board: AC230V input mains voltage ~ ~ AC output for external unit and electric lock+ - 20V DC output for the monitor power supply. 

**4576/100 Comelit cable for Simplebus 1 systems (100 mt.)**

Specific cable for Simplebus 1 systems consisting of two power supply conductors (1.5 mm<sup>2</sup>) and a small telephone braid for the signals. 100 mt coil.


**4576/500 Comelit cable for Simplebus 1 systems (500 mt.)**

Specific cable for Simplebus 1 systems consisting of two power supply conductors (1.5mm<sup>2</sup>) and a small telephone braid for the signals. 500 mt coil.


**4578/100 Comelit cable for outdoors for Simplebus 2 systems (100 mt)**

Specific cable for outdoors for Simplebus systems 2 consisting of two power supply conductors (1.5 mm<sup>2</sup>) and a small telephone braid for the signals. 100 mt coil.

**4578/500 Comelit cable for outdoors for Simplebus systems 2 (500 mt)**

Specific cable for outdoors for Simplebus systems 2 consisting of two power supply conductors (1.5 mm<sup>2</sup>) and a small telephone braid for the signals. 500 mt coil. 

**1252 Simplebus Amplifier for additional units in parallel**

Up to 16 monitors/telephones can be connected with the same address, in order to ring at the same time. By adding additional Power supplies, all the monitors they can also turn ON simultaneously after a call. Art. 1252 does not provide power to the monitor. Dimensions 6 DIN modules. Power supply 120-230 Vac. 

## Bravokit is available in the VANDALCOM version.

**8361 Wall-mounted single-family Kit with Vandalcom entrance unit and Bravo monitor**

The kit includes: a Bravo monitor art. 5701, a bracket 5714/K, a transformer art.1205/B and a Vandalcom external unit art. 4877/BK, a branch terminal art. 1214/2 and a line termination art. 1216.

**8371 Single-family colour kit with BRAVO monitor and VANDALCOM entrance panel**

The kit includes: 1 BRAVO monitor art. 5702, 1 bracket art. 5714KC, 1 transformer art. 1205/B, 1 external unit art. 4877KC, 1 branch terminal art. 1214KC and 1 termination terminal art. 1216.

**3159/1 Stainless steel box**

Stainless steel box. N° Modules 1. Dimensions 142x142x58 mm.

**4877/BK Additional external unit with 1 pushbutton**

External unit, with 1/3 CCD B/W camera, infrared lighting, microphone and loud speaker volume adjustment, aluminium call pushbutton with name label. Complete with die-cast aluminium module-holder frame and flushmounting box.

**4877BKC Additional external unit with 1 pushbutton**

External unit with 1 pushbutton, with 1/3" CCD colour camera, white LED lighting, microphone and loud speaker volume control. Complete with module-holder frame and flush-mounted box.



**[ B ] Comelit Group Belgium**

Z.3 Doornveld 170  
1731 Zellik ( Asse)  
Tel. +32 (0) 24115099 - Fax +32 (0) 24115097  
www.comelit.be - info@comelit.be

**[ D ] Comelit Group Germany GmbH**

Brusseler Allee 23- 41812 Erkelenz  
Tel. +49 (0) 243190151-23 • +49 (0) 243190151-24  
Fax +49 (0) 24319015125  
www.comelit.de - info@comelit.de

**[ E ] Comelit Espana S.L.**

Josep Estivill 67-69 - 08027 Barcelona  
Tel. +34 932 430 376 - Fax +34 934 084 683  
www.comelit.es - info@comelit.es

**[ F ] Comelit Immotec**

Siège: Parc d'activités Technologiques EUROPARC  
3, Allées des Saules - 94042 CRETEIL CEDEX  
Tél. +33 (0) 1 43 53 97 97  
Fax +33 (0) 1 43 53 97 87  
Centre logistique livraisons - commandes  
15, Rue Jean Zay - 69800 SAINT PRIEST  
Tél. +33 (0) 4 72 28 06 56  
Fax +33 (0) 4 72 28 83 29  
www.comelit.fr - comelit.NH@wanadoo.fr

**[ GR ] Comelit Hellas**

9 Epiru str.  
16452 Argiroupolis - Athens Greece  
Tel. +30 210 99 68 605-6  
Fax +30 210 99 45 560  
www.comelit.gr - telergo@otenet.gr

**[ I ] Comelit Piemonte**

Str. Del Pascolo 6/E - 10156 Torino  
Tel. e Fax +39 011 2979330  
www.comelit.eu  
infopiemonte@comelit.it

**[ I ] Comelit Sud S.r.l.**

Via Corso Claudio, 18  
84083 Castel San Giorgio (Sa)  
Tel. +39 081 516 2021  
Fax +39 081 953 5951  
www.comelit.eu  
info@comelitsud.it

**[ IRL ] Comelit Ireland**

Suite 3 Herbert Hall  
16 Herbert Street - Dublin 2  
Tel. +353 (0) 1 619 0204  
Fax +353 (0) 1 619 0298  
www.comelit.ie - info@comelit.ie

**[ NL ] Comelit Nederland BV**

Aventurijn 220-3316 LB Dordrecht  
Tel. +31 (0) 786511201  
Fax +31 (0) 786170955  
www.comelit.nl - info@comelit.nl

**[ PRC ] Comelit (Shanghai)  
Electronics Co.,Ltd**

5 Floor No. 4 Building No.30,  
Hongcao Road, Hi-Tech Park Caohejing,  
Shanghai, China  
Tel. +86-21-64519192/9737/3527  
Fax +86-21-64517710  
www.comelit.com.cn - comelit@comelit.com.cn

**[ RU ] Comelit Russia**

Partiyiny per., n.1, korp.58, stroenie 1,  
6 floor, off. 21, 115093, Moscow  
+7(495)644-20-97  
www.comelit.ru - info@comelit.ru

**[ SG ] Comelit Group**

**Singapore Representative Office**  
54 Genting Lane, Ruby Land Complex  
Blk 2, #06-01 - Singapore 349562  
Tel. +65-6748 8563 - Fax +65-6748 8584  
office@comelit.sg

**[ UAE ] Comelit Group U.A.E.  
Middle East Office**

P.O. Box 54433  
Dubai U.A.E.  
Tel. +971 4 299 7533  
Fax +971 4 299 7534  
www.comelit.ae  
info@comelit.ae

**[ UK ] Comelit Group UK Ltd**

Unit 4 Mallow Park  
Watchmead Welwyn  
Garden City Herts  
AL7 1GX  
Tel: +44 (0)1707377203  
Fax: +44 (0)1707377204  
www.comelitgroup.co.uk  
info@comelitgroup.co.uk

**[ USA ] Comelit Usa (formerly Cyrex)**

250 W. Duarte Rd. Suite B  
Monrovia, CA 91016  
Tel. +1 626 930 0388  
Fax +1 626 930 0488  
www.comelitusa.com  
sales@comelitusa.com

**Comelit Group SpA**

Via Don Arrigoni 5 - 24020 Rovetta S. Lorenzo - Bergamo - Italy  
Tel. +39 0346 750 011 - Fax +39 0346 71436 - www.comelit.eu - www.simplehome.eu - info@comelit.it

