

# 750 STANDARD

# FAAC

## ***underground hydraulic operator for residential and light commercial swing gates with single leaf max weight of 800 kg***



### **EXPERTLY VERSATILE AND INVISIBLE**

The FAAC 750 offers a range of 3 different operators with or without hydraulic locking designed to automate swing gates up to 3.5 metres per leaf. The underground system is invisible and silent, and is the ideal solution for artistically valuable old gates and portals.

### **VERY POWERFUL AND MECHANICALLY EFFICIENT**

The whole 750 range can easily automate gates with leaves weighing up to 800 kg each. The system consists of a sturdy, compact, underground drive unit, and a hydraulic pump unit available in three different models.

All components are integrated in a hydraulic circuit providing continuous lubrication and cooling.

### **SAFE BOTH INSIDE AND OUT**

The exclusive hydraulic device, ensuring maximum anti-crushing protection, features two highly sensitive by-pass valves. In case of an emergency, a key-protected release device, in an easy-to-access position, makes it possible to operate the gate manually. The power of hydraulic locking gives the system exceptionally high resistance against break-in attempts.

### **CONSTANT PERFORMANCE THROUGH TIME**

Reliability is assured under all atmospheric conditions and at extreme temperatures in the range - 40° C to + 55° C.

And that's not all - the FAAC hydraulic device requires very little maintenance and has another advantage too: it's low on electrical power consumption.


### **SPECIFICATIONS**

**Hydraulic pump unit** • Models with hydraulic locking at opening and closing and without hydraulic locking • Models with max leaf length up to 3.5 m • Max use frequency 45 cycles/hour • Electric motor power supply 230 Vac (+6% -10%) - 50(60) Hz • Electric motor power 220 W • Thermal protection at 120°C built into motor winding • Operating ambient temperature -40°C ÷ +55°C • Lever operated built-in release device • Single-phase motor with two rotation directions • Hydraulic gerotor pump (max low noise) • Pump flow rate 0.5 l/m and 0.75 l/m • Die-cast distribution flange • Separate control of opening and closing force by by-pass valves with tamper-proof plate • Tank in anodised aluminium • Air breather screw • Oil filling plug with level stick • Mineral hydraulic oil with additives

**Enclosure for hydraulic pump unit (optional)** • ABS enclosure • Protection class IP55 • Wall- or flush-mounting • Designed for securing to DIN guide • Designed for installation of door locking switch • Fuse-holder • Seats for capacitor supports • Removable hinges for right or left opening • Lock with triangular or customized key (optional) • Dimensions: 246x353x142 mm (LxWxH)

**Hydraulic jack** • Hydraulic jack with rack piston and transmission shaft • Leaf max weight 800 Kg • Max torque 543 Nm (with hydraulic units with pump capacity of 0.75 l/m)/5.2°/s (with hydraulic units with pump capacity of 0.5 l/m) • Angular velocity 7.8°/s (with hydraulic units with pump capacity of 0.75 l/m)/7.8° Nm (with hydraulic units with pump capacity of 0.5 l/m) • Models with rotation maximum angle 118° and 200° • Body in extruded aluminium • NIPLOY treated jack liner • NIPLOY-treated transmission shaft • Height adjustment dowels • Protection class IP67

# 750 STANDARD

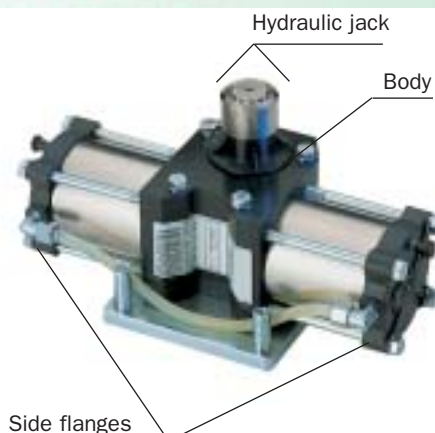

Hydraulic pump unit enclosure (option)


Enclosure lock



By-pass valves (cannot be accessed thanks to the supplied "tamper-proof" system)

marka.bo.it

## INSTALLATION LAYOUT

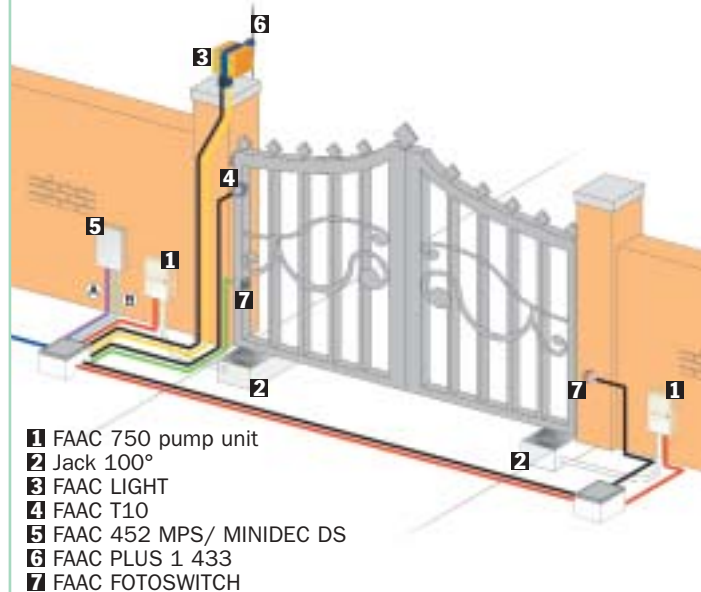


- 1 FAAC 750 pump unit
- 2 Jack 100°
- 3 FAAC LIGHT
- 4 FAAC T10
- 5 FAAC 452 MPS/ MINIDEC DS
- 6 FAAC PLUS 1 433
- 7 FAAC FOTOSWITCH

| Low voltage cabling                   | Power cabling (230V)                                       |
|---------------------------------------|--|
| (A) { 3 cables 3x0.5<br>1 cable 2x0.5 | (B) { 2 cables 3x1.5+T<br>1 cable 2x1.5+T<br>1 cable 2x1.5 |
| Hydraulic connection                  |  |

Note: Cable diameters in mm²

| Model              | Use                        |                             |               |                             |
|--------------------|----------------------------|-----------------------------|---------------|-----------------------------|
|                    | Single leaf max length (m) | Single leaf max weight (kg) | Nr. of leaves | Use frequency (cycles/hour) |
| Pump unit 750 CBAC | 1,80                       | /                           | 1             | 45                          |
| Pump unit 750 SB   | 2,50                       | /                           | 1             | 45                          |
| Pump unit 750 SBS  | 3,50                       | /                           | 1             | 30                          |
| 100° Opening jack  | /                          | 800                         | 1             | /                           |
| 180° Opening jack  | /                          | 800                         | 1             | /                           |

## Dimensions

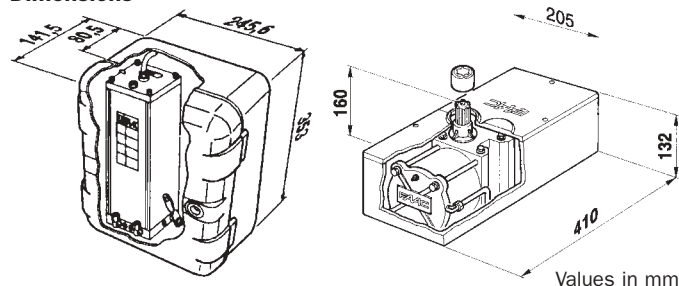

Values in mm

## Technical specifications of hydraulic pump unit

|                                     |                               |
|-------------------------------------|-------------------------------|
| Power supply                        | 230 Vac (+6% -10%) 50 (60) Hz |
| Absorbed power                      | 220 W                         |
| Absorbed current                    | 1 A                           |
| Motor rotation speed                | 1400 rpm                      |
| Pump flow rate                      | 0,75 l/min                    |
| Operating ambient temperature       | -40°C ÷ +55°C                 |
| Protection class                    | IP 55                         |
| Thermal protection on motor winding | 120°C                         |
| Weight                              | 7 kg                          |
| Type of oil                         | FAAC HP OIL                   |

| 750 CBAC                      | 750 SB | 750 SBS   |
|-------------------------------|--------|-----------|
| 230 Vac (+6% -10%) 50 (60) Hz |        |           |
| 220 W                         |        |           |
| 1 A                           |        |           |
| 1400 rpm                      |        | 960 rpm   |
| 0,75 l/min                    |        | 0,5 l/min |
| -40°C ÷ +55°C                 |        |           |
| IP 55                         |        |           |
| 120°C                         |        |           |
| 7 kg                          |        |           |
| FAAC HP OIL                   |        |           |

Note: for the control panel, please refer to the relevant brochures

| Technical specifications of hydraulic jack | 100° opening     | 180° opening         |
|--|------------------|----------------------|
| Rotation maximum angle                     | 118°             | 200°                 |
| Effective torque                           | 272 Nm (750 SBS) | 543 Nm (750 CBAC-SB) |
| Angular velocity                           | 5,2°/s (750 SBS) | 7,8°/s (750 CBAC-SB) |
| Protection class                           | IP 67            |                      |



FAAC S.p.A. via Benini, 1  
40069 Zola Predosa - Bologna (Italia)  
tel. +39 051 61724 • fax +39 051 758518  
www.faacgroup.com



908251004 - Rev. 2 - Zucchini - 3.000 - 11/2004 - The descriptions and illustrations contained in the present brochure are not binding. FAAC reserve the right to undertake product technical modifications without prior notice.